

EasyLine XLP 1-, 2- and 4-pole For DC and AC applications



The EasyLine XLP 160-630A is now available as 1-pole, 2-pole and 4-pole. The EasyLine XLP product range of 3-pole Fuse Switch Disconnectors has now been extended by a complete new range of 1-pole, 2-pole apparatus for both AC and DC voltage. In addition a new XLP 4-pole is a part of the product family and will replace the old SLP 4-pole.

- All variants of poles are available in the different sizes:
NH00/160A, NH1/250A, NH2/400A and NH3/630A.
- The XLP 1-pole and 2-pole: Rated operational voltage 220-440VDC / -690VAC
- The XLP 4-pole: Rated operational voltage 500VAC

EasyLine XLP 1-, 2- and 4-pole General

Features

All the XLP the cable terminals can be delivered with integrated bolts (M8/10) for cable lugs or with integrated bridge clamps (BC) for easy direct cable connection.

Applications

XLP 1-pole and 2-pole:

- UPS: Uninterruptible Power Supply, used for the power supply for computer/servers, storage devices, communication network systems, industry control systems, etc.
- Telecom Power Supplies.
- General protection in smaller distribution panels using 1-pole or 2-pole configurations AC or DC.

XLP 4-pole:

- General fuse protection in 4-pole power supply networks with switching neutral.
- Secondary power generators from public networks

Technical Data

1-pole	XLP00			XLP1			XLP2			XLP3		
Rated operational voltage Ue AC	-	500	690	-	500	690	-	500	690	-	500	690
Rated operational voltage Ue DC	220	-	-	220	-	-	220	-	-	220	-	-
Rated operational current Ie	160	160	125	250	250	200	400	400	315	630	630	500
Thermal current with fuse-link Ith	160	160	160	250	250	250	400	400	-	630	630	-
Utilization category	DC22B	AC22B	AC21B	DC22B	AC22B	AC21B	DC22B	AC22B	AC21B	DC22B	AC22B	AC21B

2-pole	XLP00			XLP1			XLP2			XLP3		
Rated operational voltage Ue AC	-	500	690	-	500	690	-	500	690	-	500	690
Rated operational voltage Ue DC	220	-	-	440	-	-	440	-	-	440	-	-
Rated operational current Ie	160	160	125	250	250	200	400	400	315	630	630	500
Thermal current with fuse-link Ith	160	160	160	250	250	250	400	400	-	630	630	-
Utilization category	DC22B	AC22B	AC21B	DC22B	AC22B	AC21B	DC22B	AC22B	AC21B	DC22B	AC22B	AC21B

4-pole	XLP00			XLP1			XLP2			XLP3		
Rated operational voltage Ue AC		500			500			500			500	
Rated operational current Ie		160			250			400			630	
Thermal current with fuse-link Ith		160			250			400			630	
Utilization category		AC22B			AC22B			AC22B			AC22B	

EasyLine XLP 1-, 2- and 4-pole Ordering Table

The complete range of XLP 1-, 2-, 4-pole types including the existing XLP 3-pole.

XLP 1-pole	
1SEP600113R0001	XLP00-1P
1SEP600113R0002	XLP00-1P-2BC
1SEP600113R0003	XLP00-1P-2M8
1SEP600116R0001	XLP1-1P
1SEP600116R0002	XLP1-1P-2BC
1SEP600116R0003	XLP1-1P-M10
1SEP600122R0001	XLP2-1P
1SEP600122R0002	XLP2-1P-2BC
1SEP600126R0001	XLP3-1P
1SEP600126R0002	XLP3-1P-2BC

XLP 2-pole	
1SEP600114R0001	XLP00-2P
1SEP600114R0002	XLP00-2P-4BC
1SEP600114R0003	XLP00-2P-4M8
1SEP600117R0001	XLP1-2P
1SEP600117R0002	XLP1-2P-4BC
1SEP600117R0003	XLP1-2P-4M8
1SEP600123R0001	XLP2-2P
1SEP600123R0002	XLP2-2P-4BC
1SEP600127R0001	XLP3-2P
1SEP600127R0002	XLP3-2P-4BC

XLP 4-pole	
1SEP600115R0001	XLP00-4P
1SEP600115R0002	XLP00-4P-8BC
1SEP600115R0003	XLP00-4P-8M8
1SEP600119R0001	XLP1-4P
1SEP600119R0002	XLP1-4P-8BC
1SEP600119R0003	XLP1-4P-8M8
1SEP600124R0001	XLP2-4P
1SEP600124R0002	XLP2-4P-8BC
1SEP600128R0001	XLP3-4P
1SEP600128R0002	XLP3-4P-8BC

XLP 3-pole	
1SEP201428R0001	XLP000-6CC
1SEP201428R0002	XLP000-6CC in carton
1SEP201432R0001	XUP000-6CC
1SEP101890R0001	XLP00
1SEP101890R0005	XLP00-S&J-6M8
1SEP101890R0002	XLP00-6BC
1SEP101890R8002	XLP00-6BC-3M8
1SEP101890R0004	XLP00-6M8
1SEP101890R0012	XLP00-EFM-6BC
1SEP101890R0402	XLP00-w/MNS adapter-3BC
1SEP101890R0412	XLP00-w/MNS adapter-EFM-3BC
1SEP101916R0001	XLP00-A60/60-B-3BC
1SEP101916R0002	XLP00-A60/60-B
1SEP101917R0001	XLP00-A60/60-A-3BC
1SEP101889R0002	XLP00-A40/95-B-3BC
1SEP101898R0002	XLP00-A40/75-B-3BC
1SEP101898R0004	XLP00-A40/75-B-3M8
1SEP101899R0002	XLP00-A40/120-B-3BC
1SEP101899R0004	XLP00-A40/120-B-3M8
1SEP101891R0001	XLP1
1SEP101891R0002	XLP1-6BC
1SEP101891R0004	XLP1-6M10
1SEP101891R0012	XLP1-EFM-6BC
1SEP101918R0001	XLP1-A60/85-B-3BC
1SEP101919R0001	XLP1-A60/85-A-3BC
1SEP101912R0002	XLP1-A40/120-A-3BC
1SEP101912R0004	XLP1-A40/120-A-3M10
1SEP101895R0001	XUP1
1SEP101895R0002	XUP1-6BC

XLP 3-pole	
1SEP101892R0001	XLP2
1SEP101892R0004	XLP2-S&J-6M12
1SEP101892R0002	XLP2-6BC
1SEP101892R0012	XLP2-EFM-6BC
1SEP102285R0001	XLP2-A60/120-A
1SEP102286R0001	XLP2-A60/120-B
1SEP101974R0001	XUP2
1SEP101975R0001	XLP3
1SEP101975R0002	XLP3-6BC
1SEP101975R0012	XLP3-EFM-6BC
1SEP102287R0001	XLP3-A60/120-A
1SEP102288R0001	XLP3-A60/120-B




Power and productivity
for a better world™




EasyLine XLP 1-, 2- and 4-pole Dimensional Drawings

XLP00

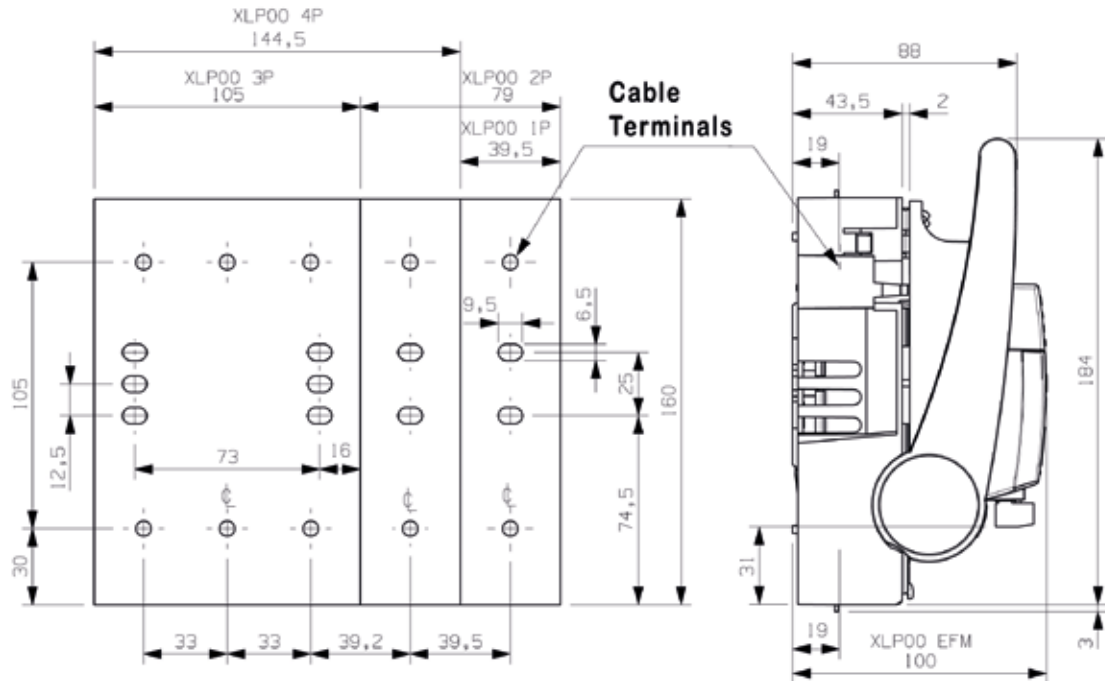


XLP1

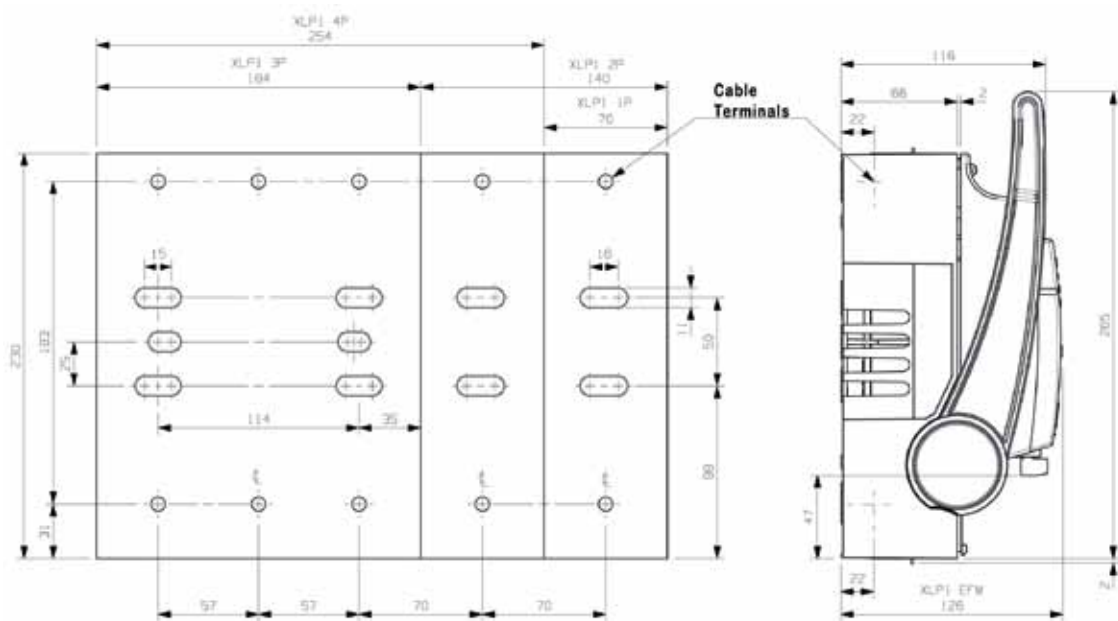


EasyLine XLP 1-, 2- and 4-pole Dimensional Drawings

XLP2

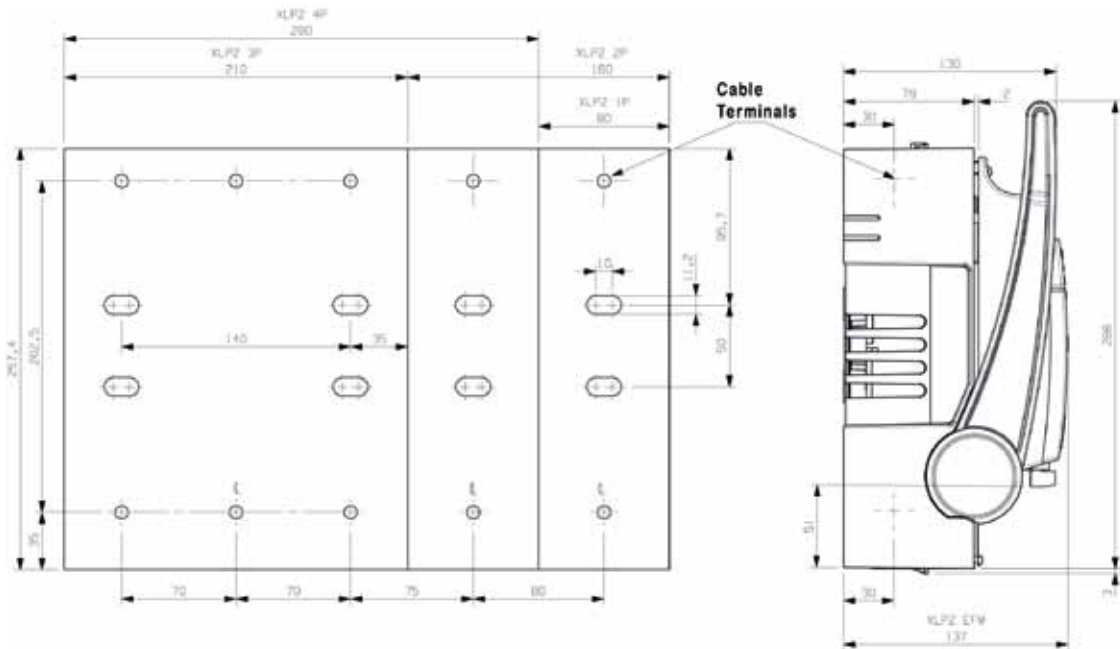

XLP3

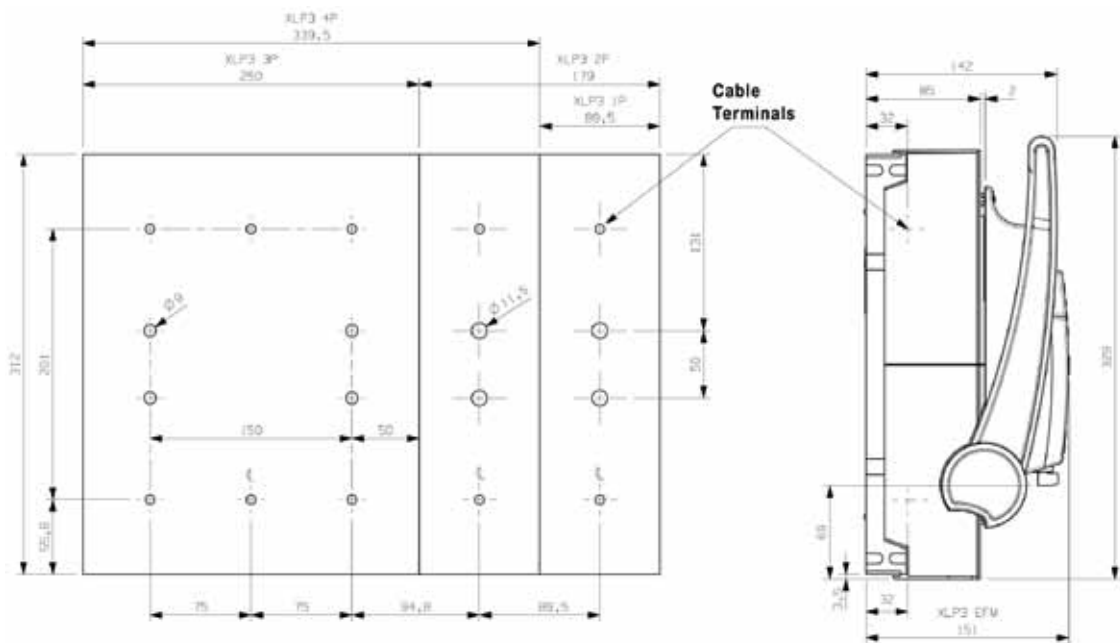

EasyLine XLP 1-, 2- and 4-pole
Notes

A series of horizontal dotted lines spanning the width of the page, intended for handwritten notes.

For more information please contact:

ABB AS

Low Voltage Products

P.O. Box 100, Sentrum

N-3701 Skien, Norway

Phone: +47 35 58 25 00

www.abb.com/fusegear